

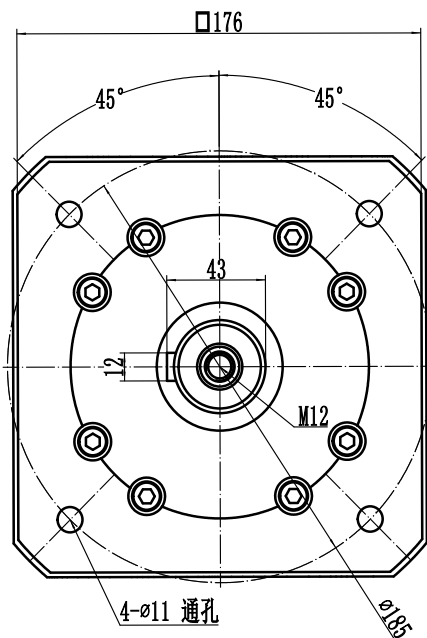


Output

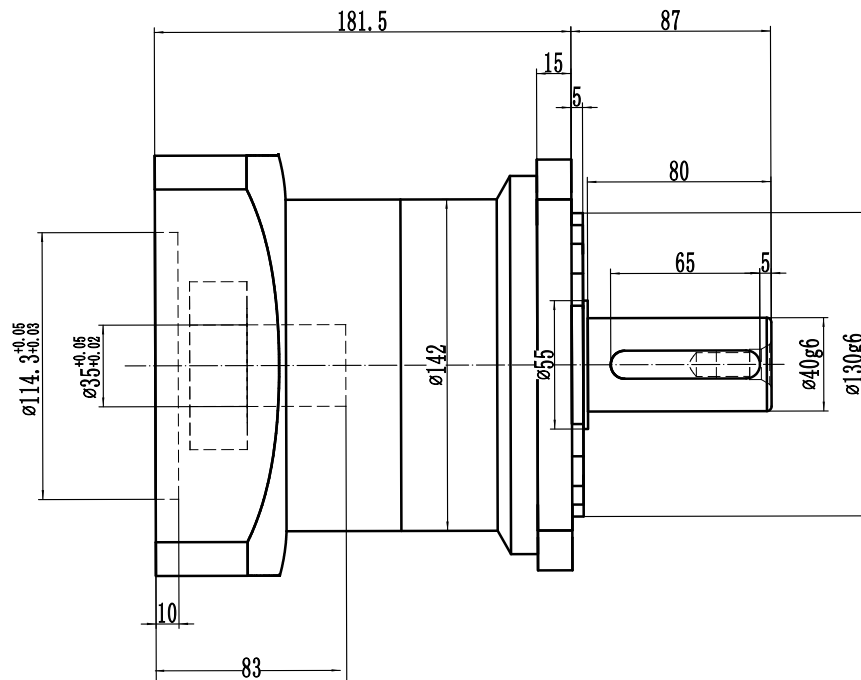

Input

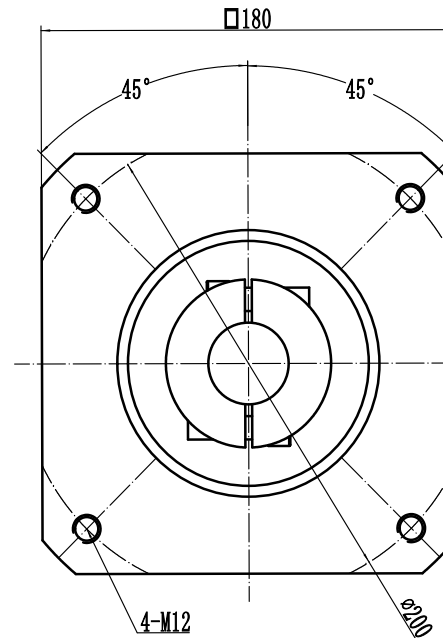

- 1、Common deceleration ratio: 3、4、5、7、10
Less commonly used deceleration ratio: 8
- 2、Rated output torque: 500 Nm
- 3、Maximum output torque: Two times the rated output torque
- 4、Rated input speed: 3000 RPM
- 5、Maximum input speed: 6000 RPM
- 6、Backlash: ≤ 8 Arcmin
- 7、Noise: ≤ 60 dB

The input end size that can be made by this product:

22/110/145-M8/58	24/110/145-M8/58	22/110/145-M8/70
24/110/145-M8/70	22/110/130-M8/58	22/148/185-M10/60
24/110/130-M8/58	24/100/155-M8/55	24/110/155-M8/55
24/130/165-M10/60	28/110/145-M8/60	28/130/174-M10/80
35/114.3/200-M12/80	35/114.3/200-M12/115	
42/114.3/200-M12/115	32/180/215-M12/80	
38/180/215-M12/80	38/180/215-M12/115	

Drawing unit: mm
The size of the motor
suitable for this drawing

160TDF-35200114-L1-H

Planetary gear reducer

35/114.3/200-M12/79

Group internal figure number: H0605110027